TIME - CURRENT CHARACTERISTIC CURVES
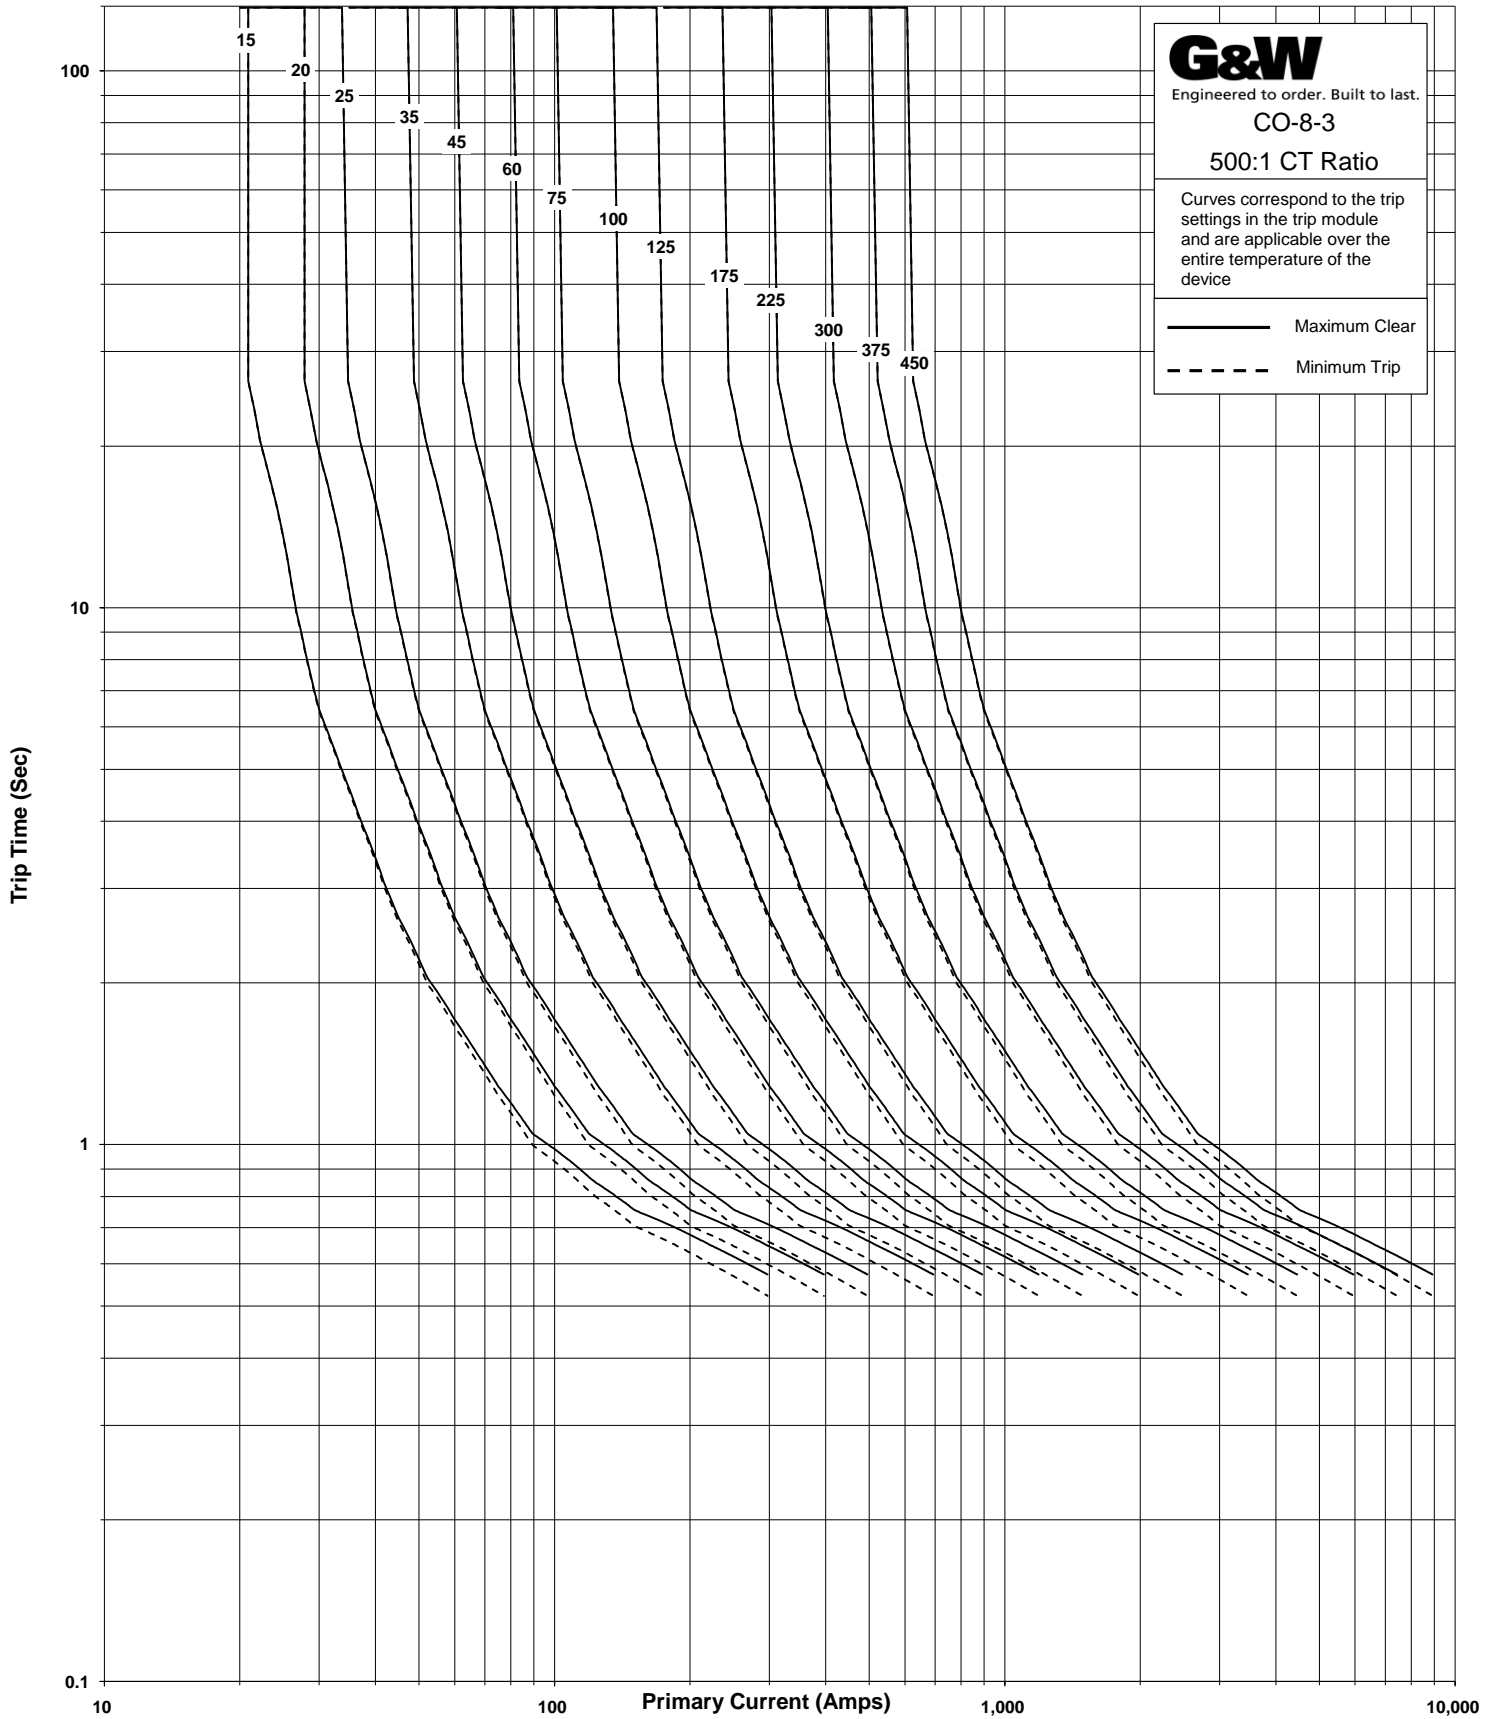**FOR VI CONTROLS**

G&W
Engineered to order. Built to last.
CO-8-3
500:1 CT Ratio

Curves correspond to the trip settings in the trip module and are applicable over the entire temperature of the device

———————— Maximum Clear
– – – – – – – Minimum Trip

Trip Time (Sec)

Primary Current (Amps)

15
20
25
35
45
60
75
100
125
175
225
300
375
450